

6.3/10 Concassé

Péetrographie : RHYOLITE
Elaboration : Concassé

Partie normative

Valeurs spécifiées sur lesquelles le producteur s'engage

Classe granulaire

Norme

Code

6.3 10

Norme NF P 18-545 Article 8 - EN 13043


Bnc II Ang1 C100/0

	d/2		d		D		1.4D		2D		f	FI	MBF	LA	MDE	PSV
	0.063	3.15	4	5	6.3	8	10	12.5	14	20						
Etendue e					10		10									
V.S.S.+U	1.3	6			20		95				1.3					
V.S.S.	1.0	5			15		90				1.0	20	10.0	20	15	
V.S.I.	0.0				5		80		98	100	0.0					50
V.S.I.-U	0.0				0		75		97		0.0					

Partie informative

Résultats de production

	du 06/07/23 au 13/12/23											du 01/01/22 au 30/12/23				
	0.063	3.15	4	5	6.3	8	10	12.5	14	20	f	FI	MBF	LA	MDE	PSV
Maximum	0.8	2	3	5	12	49	86	100	100	100	0.8	15		14	8	56
Xf+1.25xEcart-types	0.7	2	3	5	12	47	85	100	100	100	0.7	15		14	8	56
Moyenne Xf	0.6	1	2	3	10	41	83	99	100	100	0.6	13	7.0	13	7	56
Xf-1.25xEcart-types	0.4	1	1	1	8	35	81	99	100	100	0.4	10		13	7	55
Minimum	0.3	1	1	2	7	32	81	99	100	100	0.3	9		13	7	55
Ecart-type	0.12	0.5	0.8	1.3	1.5	4.7	1.7	0.4	0.0	0.0	0.10	2.0		1.0	1.0	1.0
Nombre de résultats	17	17	6	7	17	17	17	17	17	17	17	6	1	4	4	2

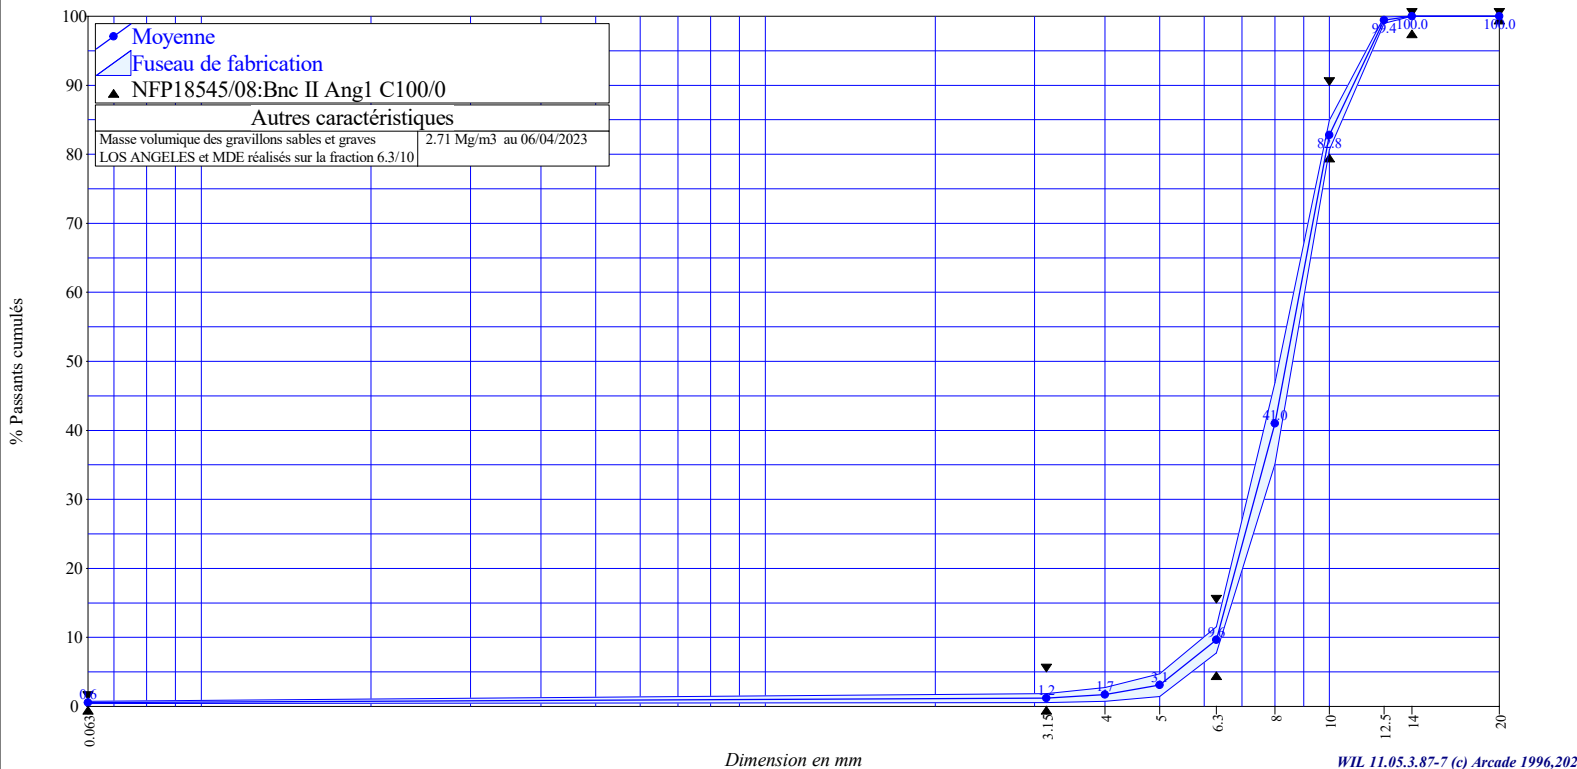

David REYNAL