

6.3/10 concassé

Pétrographie : RHYOLITE
Elaboration : Concassé

Partie normative

Valeurs spécifiées sur lesquelles le producteur s'engage

Classe granulaire

Norme

Code

6.3 10

Norme NF P 18-545 Article 8 - EN 13043


Bnc II Ang1 C100/0

	d/2	d	D	1.4D	2D	f	FI	MBF	LA	MDE	PSV
	0.063	3.15	4	5	6.3	8	10	12.5	14	20	
Etendue e					10		10				
V.S.S.+U	1.3	6			20		95			1.3	
V.S.S.	1.0	5			15		90		20	10.0	20 15
V.S.I.	0.0				5		80		98	100	0.0 50
V.S.I.-U	0.0				0		75		97		0.0

Partie informative

Résultats de production

	du 01/07/24 au 12/12/24											du 30/12/22 au 30/12/24				
	0.063	3.15	4	5	6.3	8	10	12.5	14	20	f	FI	MBF	LA	MDE	PSV
Maximum	0.9	3	3	5	12	47	89	100	100	100	0.9	15		14	8	56
Xf+1.25xEcart-types	0.9	2	3	5	12	48	86	100	100	100	0.9	15		14	8	56
Moyenne Xf	0.7	2	2	3	9	39	83	100	100	100	0.7	14	5.0	14	7	56
Xf-1.25xEcart-types	0.5	1	1	2	7	30	80	99	100	100	0.5	12		13	6	55
Minimum	0.3	1	2	2	5	16	80	99	100	100	0.3	12		13	6	55
Ecart-type	0.16	0.6	0.7	1.2	2.1	7.0	2.4	0.4	0.0	0.0	0.20	1.0		1.0	1.0	1.0
Nombre de résultats	17	17	6	6	17	17	17	17	17	17	17	6	1	4	4	2

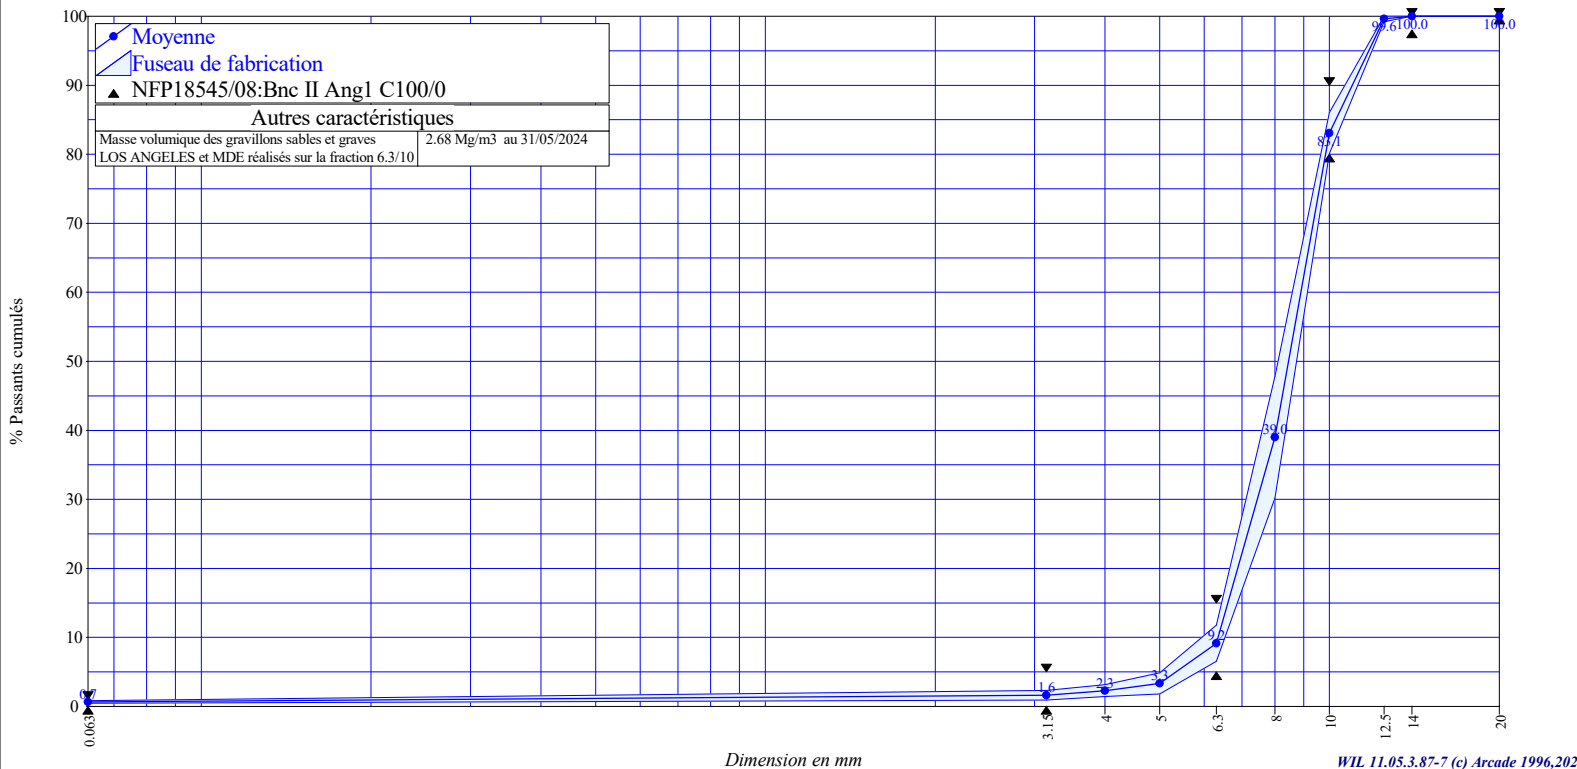

David REYNAL